

HANDLES

Oval Flush

Oval Shank

Pistol-grip

Round-knurled

Other _____


ACTIONS

Maintained

Spring-return

NAMEPLATE

* _____



Panel Thickness 3/16 Depth behind panel 3.53



1/4 PC. SPECIAL FEATURES

TITLE ENGRAVING:

POSITION ENGRAVING					

DECK	CONTACTS HANDLE END	POSITIONS					
		1	2	3	4	5	6
1	10	X	X				X
+	11		X	X	X		
2	12			X	X	X	
+	13				X	X	X
3	14	X					
+	15		X				
4	16			X			
+	17				X		
5	18	X					X
+	19		X				
6	20			X			
+	21				X		
7	22	X	X				X
+	23		X	X	X		
8	24			X	X	X	
+	25				X	X	X
9	26	X					X
+	27		X				
10	28			X			
+	29				X		

DECK	A	B	C	D	E	F
1	○	● ₁	○	○	○	○
2	● ₂	○	● ₃	● ₄	○	● ₅
3	○	● ₆	○	○	○	○
4	● ₇	○	● ₈	● ₉	○	● ₁₀
5	○	● ₁₁	○	○	○	○
6	● ₁₂	○	● ₁₃	● ₁₄	○	● ₁₅
7	○	● ₁₆	○	○	○	○
8	● ₁₇	○	● ₁₈	● ₁₉	○	● ₂₀
9	○	● ₂₁	○	○	○	○
10	● ₂₂	○	● ₂₃	● ₂₄	○	● ₂₅
	○	○	○	○	○	○
	○	○	○	○	○	○
	○	○	○	○	○	○

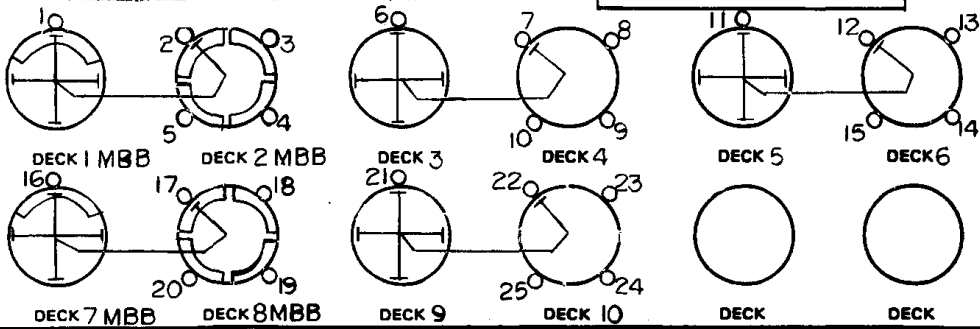

REVISIONS: 22904
3-31-95

MADE BY: <u>JMS</u>	DATE: <u>4-13-95</u>	COMPANY: <u>CATERPILLAR</u>	DWG. NO: <u>127-2331</u>
APP BY: <u>JM</u>	DATE: <u>4-13-95</u>		SHEET OF