


CDE/CDB3...Wx.x	BG1 <sup>2)</sup>	BG2 <sup>2)</sup>	BG2	BG3	BG4	BG5	BG6	BG7	BG7a
Weight [kg]	1.6	2.3	3.5	4.4	6.5	7.2	13	28	32
B (width)	70				120	170	190	280	280
H (height) (CDE/	220/193	245/218	247/247	300		348	540	540	
T (depth)	120	145	220	218		230	267,5	321	
A	50		40		80	130	150	200	200
C (CDE/CDB)	230/205	255/230	260	320		365	581	581	
D $\varnothing$	$\varnothing$ 4.8				$\varnothing$ 5.6	$\varnothing$ 9.5	$\varnothing$ 9.5		
Screws	4 x M4				4 x M5	4 x M9	4 x M9		
E see Figure 2.1	0	0 <sup>4)</sup>	0		10		10		
E1 see Figure 2.1					35/50 <sup>1)</sup>		35/50 <sup>1)</sup>		
F see Figure 2.1					100 <sup>3)</sup>		100 <sup>3)</sup>		
G see Figure 2.1					$\geq$ 300		$\geq$ 500		
J (CDE/CDB)	18/45			45	55	Shield specified	-		
K	215	240	270	330		382	600		

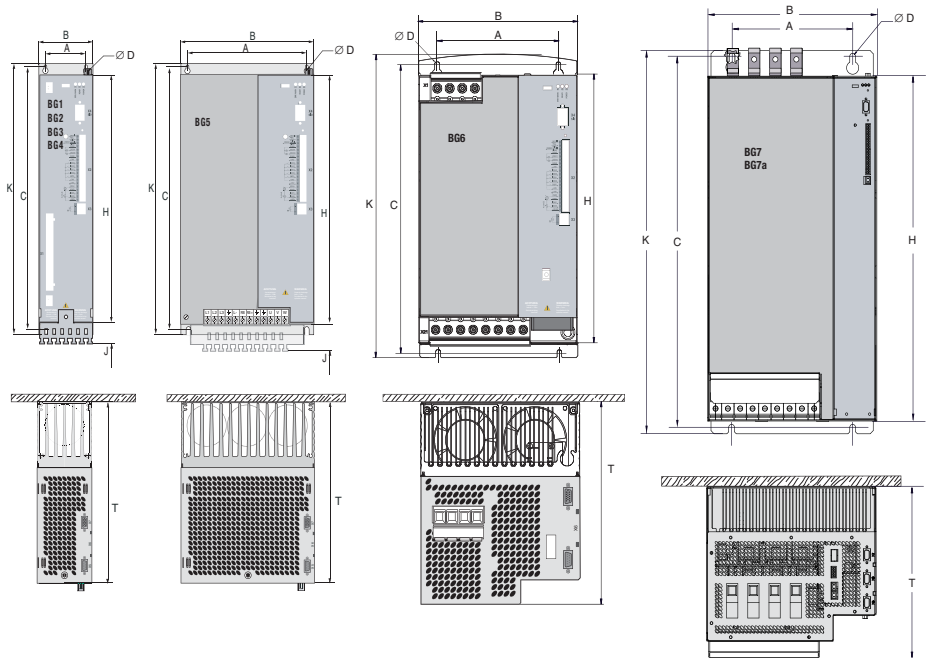

- 1) 50 mm clearance between the controllers to enable replacement of the side option module (without dismantling the drive controller).
- 2) Corresponds to cold plate version, see Table 2.2.
- 3) Additionally allow enough space at the bottom for the bend radii of the connecting cables.
- 4) End-to-end mounting of CDB32.008, Cx.x not permitted. Please use CDB32.008, Wx.x.

Table 2.1 Dimensional drawings for wall mounting (dimensions in mm)