



distributor G3/8" series KPV

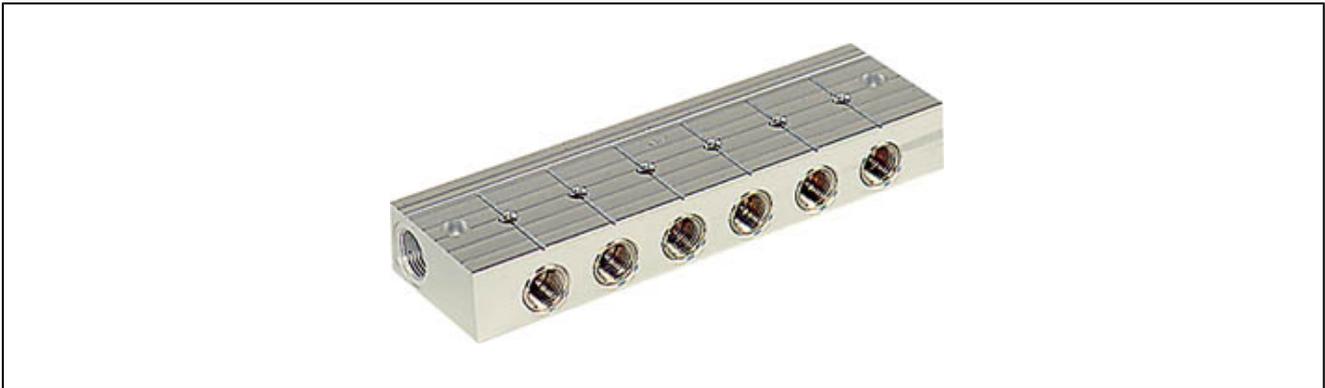

design	distributor with integrated ball valves
connection	G3/8" according to ISO228/1
materials	body aluminum anodized ball and stem brass chromium-plated ball seal PTFE, stem seal and o-ring NBR
medium temperature	-10...+100°C
pressure range	vacuum to 10bar
actuation	by screw driver
type of fixing	installation in a pipe system or by mounting holes
design	one-sided outlets
number of outlets	6 respectively 10

dimension

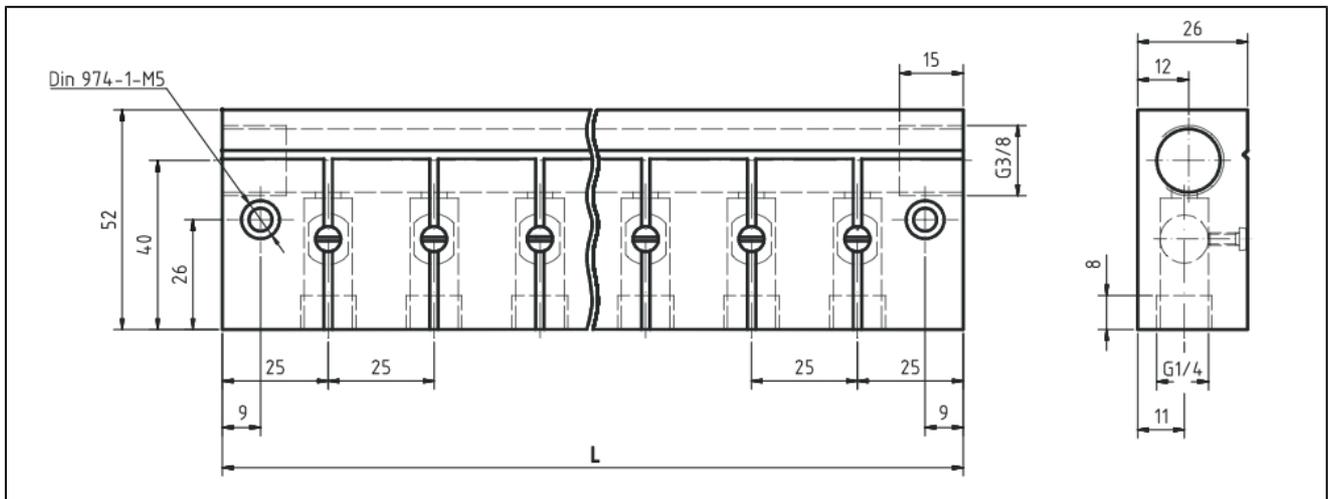

outlets	L	number of outlets	weight [app. g]	type
G1/4"	175	6	650	KPV-5226-6E
G1/4"	275	10	890	KPV-5226-10E

illustrations are for information only and are non-binding
all designs, configurations, measurements and materials are subject to change without prior notice