

Milliohmometer RESISTOMAT® for Production and Laboratory

Model 2316

Code: 2316 E
 Manufacturer: burster
 Delivery: ex stock/6 weeks
 Warranty: 24 months

2316-E



- Measuring ranges from 2 mΩ to 200 kΩ
- Resolution up to 0.1 μΩ
- Accuracy 0.03 % Rdg.
- Autorange
- Temperature compensation for all materials
- Thermal e.m.f. compensation
- Input voltage protection up to 400 V_{eff}
- RS232 and PLC interface standard (USB option)

Application

Fast and accurate measurements of the smallest resistance values are possible with the milliohmometer RESISTOMAT® model 2316. Due to the rugged aluminium injection moulding desktop housing with membrane keypad it is suitable for use in laboratory and industrial environment likewise.

Wires and coils can be measured with temperature compensation. The temperature of the sample is measured with a Pt 100 or pyrometer and the resistance is then corrected to the equivalent at e.g. 20 °C (adjustable) in the instrument.

The application range is very wide such as the measurement of:

- ▶ transformer motor coil windings
- ▶ coils of all kind
- ▶ cables and wires on the drum or as meter samples
- ▶ switch and relay contacts
- ▶ heating elements
- ▶ fuses
- ▶ connections and transitions at power rails and many more

For a cooling curve recording with freely selectable time interval a data logger for up to 1000 values is available.

The complete control via RS232 interface enables the setup of fully automatic test stations. The instrument features a PLC interface for integration into production process control classification and makes selection of the samples an easy task.

Description


The device works according to the proven 4-wire measurement method which eliminates errors caused by test lead and contact resistances. Thermo voltages that might be in the measurement circle would be compensated automatically by this measurement method. The control of the measurement leads is done with an integrated cable fraction detection.

A temperature compensation for any given sample material such as copper, aluminium, tungsten, etc. is self-evident. The temperature measurement is done by an external Pt 100 sensor or by an external infrared measurement device (ref. to accessories). A special measurement voltage input protection was developed for testing large inductive samples so that voltage peaks do not cause permanent damage while pinching off the sample.

16 device settings such as the measurement range, limit values, temperature coefficient, etc. can be saved in order to test samples with different parameters in an automatic measurement system. All device specific settings are shown to the user via display. Calling up the settings is done via keypad or via PLC interface with a bit pattern (4-bits). It goes without saying that all device settings may also be effected via the RS232 interface.

The high-contrast LCD display with backlight assures very good reading of the measurement value in dark as well as bright spaces.


Measurement Display

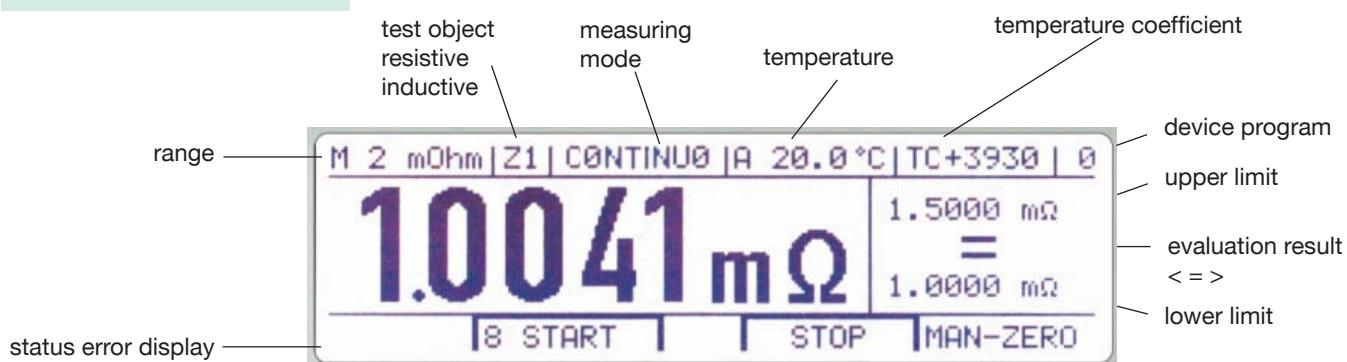


Menu



Measurement Program

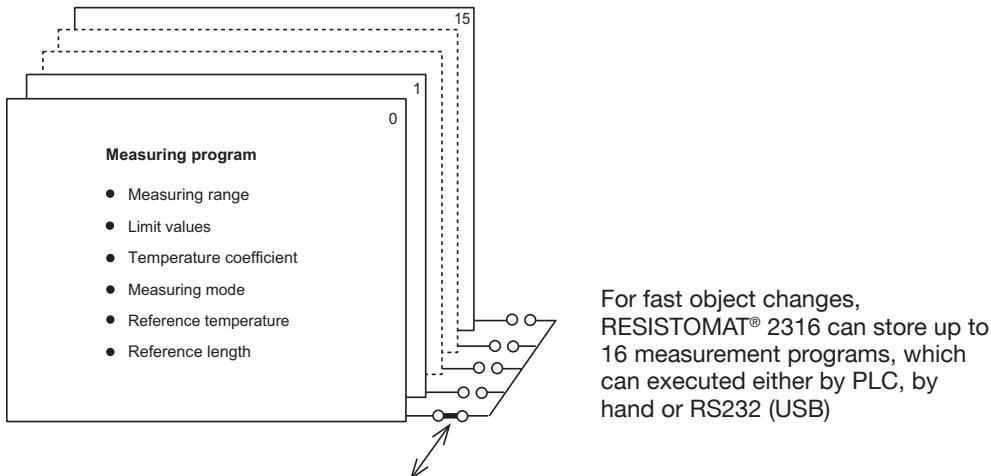

Rear Side

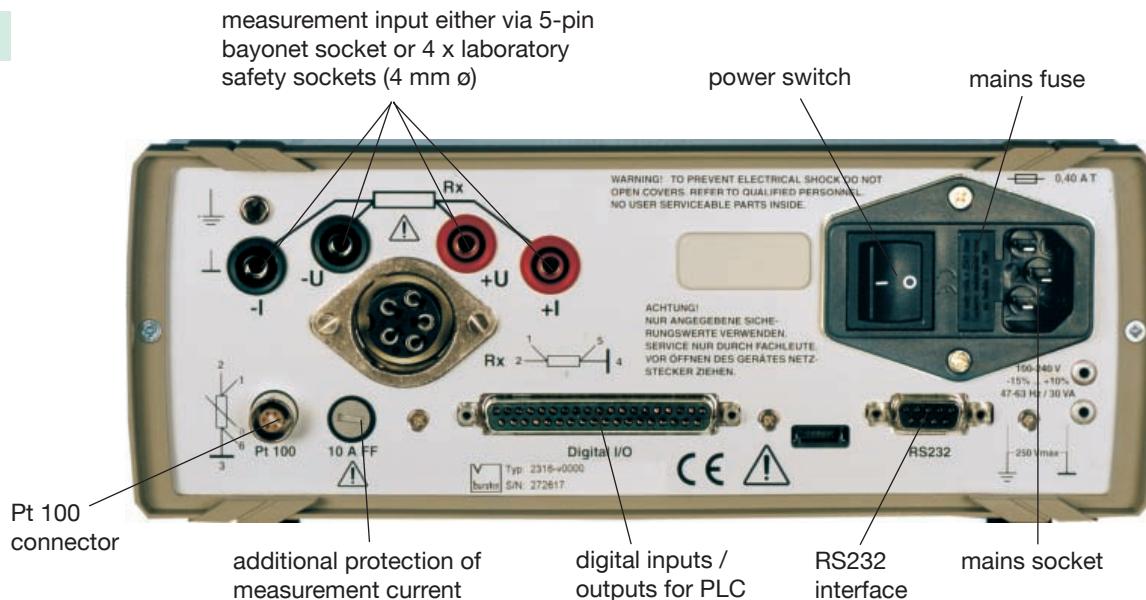

Device and Documentation Software

The software model 2316-P001 is especially developed for the device setting, measurement value evaluation as well as measurement report printout.


A demo version is available at www.burster.com/software.html.

Following features are available:

- ▶ Full control of RESISTOMAT® model 2316
- ▶ On-line display of the measuring values including limits in graphic or tabular mode
- ▶ Direct storage of the measuring values with time stamp in ASCII files
- ▶ Export of all data in ASCII format to MS-EXCEL
- ▶ Printout of a test certificate with your own logo
- ▶ Complete cooling curve record and printout of motor and transformer windings with extrapolation in Excel
- ▶ Backup of device settings

System requirements:

- | | |
|------------|--|
| Processor: | Pentium 500 MHz (at least) |
| Graphic: | VAG 800 x 600 (at least) |
| | 256 colours (at least) |
| Memory: | 64 MB RAM (at least) |
| | WIN 98SE and WIN NT 4.0 |
| | 128 MB RAM (at least) |
| | (WIN ME, WIN2000, WIN XP) |
| Hard Disk: | approx. 200 MB free memory |
| Interface: | RS232 or USB (with option USB adapter) |

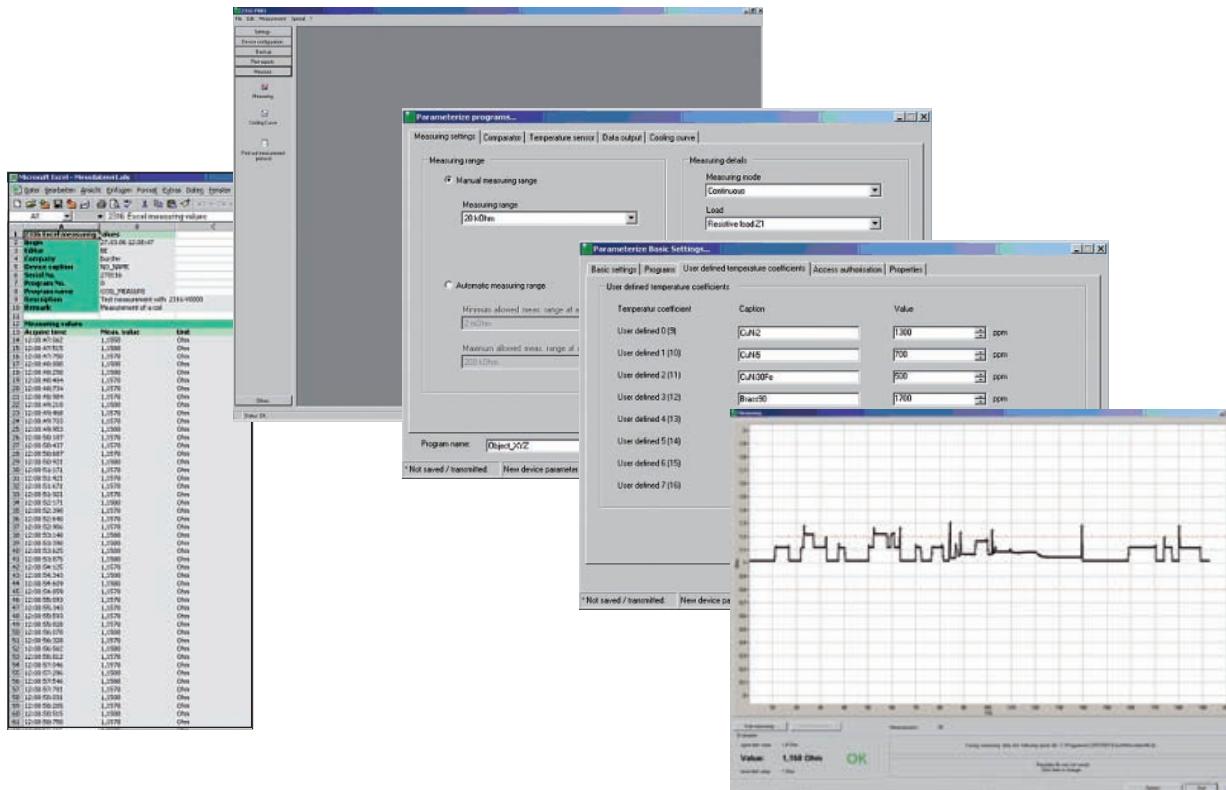

Application Examples

Quality control on wires and cable

- ▶ Testing of variable wire lengths from 100 mm ... 1000 mm measurement length
- ▶ The integrated temperature compensation allows a standardized resistance value in correspondence to the reference temperature (Germany e.g. 20 °C)
- ▶ Individual selection of material specific temperature coefficient



Cooling curve measurement on electric motors

- ▶ Selectable sample rate
- ▶ Data logger for up to 1000 measurement values
- ▶ External control of load stop
- ▶ Transfer of measurement data to EXCEL via PC software



Technical Data

Construction

The device has a service-friendly construction in a sturdy aluminium die casting housing which enables good access to the various components. The operation is done via the membrane keypad. The connections for the sample, the in- and outputs of the RS232/PLC interface as well as the Pt 100-sensors are located at the backside of the device.

The device features a diagnosis function for current source, amplifier, display, internal operation voltage and PLC I/O.

Measuring range	Resolution	Measuring current small**	Measuring current big**
* 2 mΩ	0.0001 mΩ	3 A	3 A
20 mΩ	0.001 mΩ	1 A	1 A
200 mΩ	0.01 mΩ	100 mA	1 A
2 Ω	0.0001 Ω	10 mA	1 A
20 Ω	0.001 Ω	10 mA	100 mA
200 Ω	0.01 Ω	1 mA	10 mA
2 kΩ	0.1 Ω	1 mA	1 mA
20 kΩ	1 Ω	100 μA	100 μA
200 kΩ	10 Ω	10 μA	10 μA

*RESISTOMAT model 2316-V0001 only

**adjustable at the device

Accuracy (with temp. comp. off): $\leq \pm 0.03\% \text{ Rdg.} \pm 3 \text{ Digit}$

Burden voltage: approx. 5 V max.

Measuring time (for ohmic probes): approx. 500 ms

Warm-up time to attain the error tolerance range: < 15 min

Measurement connection: 4-wire technology for current and voltage measurement (KELVIN), ground-free circuit design
FE-PE max. 250 V

Input protected: against induction voltages and external voltages up to 400 V_{eff}

Measurement mode: continuous and single measurement, cooling curve measurements on motor or transformer windings alternated measurement 250 ms fast measurement

Data logger: up to 1000 values (only in "cooling curve" mode)

Limit values: Hi/Lo limits programmable via keypad or interface

Range selection: manually or automatically

Automatic temperature compensation: 7 different temperature coefficients can be chosen and additional 8 TCs are adjustable

Temperature measurement: 0 ... 100 °C, resolution 0.1 °C, accuracy 0.1 °C
with ext. Pt100 sensor or temperature transmitter (pyrometer) with a voltage output of 0 ... 10 V

Display: high-contrast graphic LCD with adjustable contrast and LED background illumination 264*64 Dots, 127 x 34 mm

Measurement display: max. 21 000 counts for 16 different device settings

Device setting memory:

Operator language: German, English, French, Italian, Spanish

Mains supply: 85 ... 264 V AC 50/60 Hz

Power consumption: approx. 30 VA

Temperature drift: 50 ppm/K

Operation temperature: 0 ... +23 ... +50 °C

Humidity non-condensing: 80 % rel. hum. (up to 31 °C), thereover linearity decreasing to 50 % at 50 °C

Storage temperature: 0 ... +70 °C

Weight: 3.5 kg

Dimensions (W x H x D): 247 x 106 x 275 [mm]

19"-3HU rack mount set optionally

Device protection: EN 61010-1 protection class1

Type of protection: IP 40

Connections

Measuring input:

alternatively via 4 terminals (ø 4 mm)

or 5-pin socket with bayonet lock

6-pin, LEMO socket EGG.1B.306

37-pin subminiature D-socket

PLC interface with positive logic

(negative logic optionally)

additional comparator output

with relay (disconnectible) 24 V / 1 A

9-pin subminiature D-socket

300 ... 57 600

Protocol: ANSI X3.28 1976 Subc.2.1,A3

SCPI commands: Vers. 1995.0

direct data recording to a printer with

RS232 interface is possible

possible with an RS232/USB adapter cable

model 9900-K351

USB interface:

Calibrations Sets:

1. The **calibration set model 2316-Z010** consists of 4 calibration resistors series 1240 with the values 1 mΩ, 10 mΩ, 100 mΩ and 1 Ω, including one DKD certificate for each resistor. The added adapter model 2394 allows a direct contacting with the RESISTOMAT®. This calibration certificate documents the traceability to national standards. Full description see data sheet 1240-E
2. The **calibration set model 2316-Z011** consists of 3 calibration resistors 10 mΩ, 100 mΩ and 1 Ω as well as adapter 2394. Otherwise as before mentioned.

Order Information

RESISTOMAT®

Range 20 mΩ ... 200 kΩ

Model 2316-V0000

Range 2 mΩ ... 200 kΩ

Model 2316-V0001

Accessories

Measurement leads, 4-pin, 1.5 m long shielded cable with banana plugs and bayonet socket

Model 2329-K001

Temperature sensor with 2.5 m shielded connection line and 6-pin connection plug

Model 2392-V001

Infrared temperature sensor (pyrometer) temperature range 0 ... 100 °C

Model 2328-Z001

RS232 data transmission lead

Model 9900-K333

USB data transmission lead

Model 9900-K351

37-pin plug for digital I/O interface

Model 9900-V165

5-pin bayonet plug for measuring input

Model 9900-V172

19"rack mount kit (3 HU)

Model 2316-Z001

External device program selecting switch with cable 2 m length and power supply

Model 2316-Z002

External foot switch for measuring start/stop with cable 2 m length

Model 2316-Z003

Device and documentation software

Model 2316-P001

Calibration set

Model 2316-Z010

Calibration set

Model 2316-Z011

DKD Calibration

Model 2316-V0000

Model 23DKD-2316-V0000

Model 2316-V0001

Model 23DKD-2316-V0001

WKS Calibration

Model 2316-V0000

Model 23WKS-2316-V0000

Model 2316-V0001

Model 23WKS-2316-V0001

For DKD (Deutscher Kalibrierdienst) calibrations we use PTB-calibrated standards (national institute).

For WKS (manufacturer calibration) calibrations we use DKD-calibrated resistors.

Kelvin measuring pliers and probes

see data sheet 2385-E

Wire holding devices for wires up to 2500 mm² **see data sheet 2381-E**

see data sheet 1240-E

Physicom Corp.

sales@physicomcorp.com Toronto: 416 754 3168, Montreal: 514 695 5147, Toll Free: 1888 754 7008